


Grinders


Angle models



RRG-2090

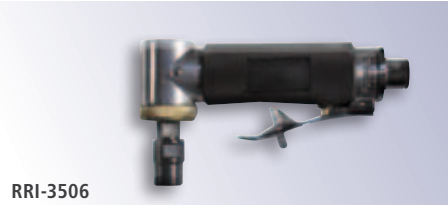

RRI-3506

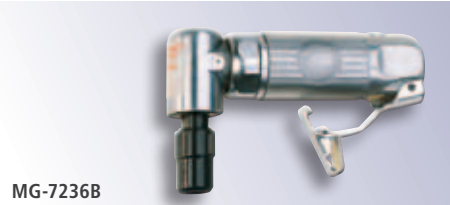

MG-7236B

Type	Brand	Wheel size mm	RPM	Power kW	Collet chuck mm	Air-cons. l/s	Weight kg	Inlet-thread	Hose diameter mm	Vibration m/s ²	Noise level dB(A)
RRG-2090	RRA	35	20.000	0,23	6	4,0	0,56	PT 1/4"	6,5	2,4	84
RRI-3506	RRI	40	18.000	0,22	6	4,9	0,55	PT 1/4"	6,5	1	80
MG-7236B	TOKU	40	20.000	0,20	6	5,0	0,45	PT 1/4"	6,5	2	85

Air turbine grinder




RRI-T1565 / RRI-T1550 / RRI-T1135



RRI-T3340



RRI-T4065 / RRI-T3750 / RRI-T3335

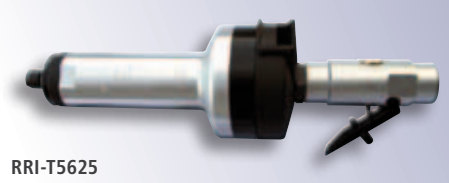

RRI-T5625

Type	Brand	Wheel-size mm	RPM	Power kW	Collet chuck mm	Air-cons. l/s	Weight kg	Inlet-thread	Hose diameter mm	Vibration m/s ²	Noise level dB(A)
RRI-T1565	RRI	9	65.000	0,15	3	3,7	0,135	PT 1/4"	6,5	<2,5	75
RRI-T4065	RRI	9	65.000	0,4	3	5,6	0,2	PT 1/4"	6,5	<2,5	75
RRI-T1550	RRI	20	50.000	0,15	3	3,7	0,135	PT 1/4"	6,5	<2,5	75
RRI-T3750	RRI	20	50.000	0,37	3	5,6	0,2	PT 1/4"	6,5	<2,5	75
RRI-T3340	RRI	20	40.000	0,33	6	5,6	0,4	PT 1/4"	6,5	<2,5	75
RRI-T1135	RRI	20	35.000	0,11	3	3,7	0,135	PT 1/4"	6,5	<2,5	75
RRI-T3335	RRI	20	35.000	0,33	3	5,6	0,2	PT 1/4"	6,5	<2,5	75
RRI-T5625	RRI	35	25.000	0,56	6	5,6	1,0	PT 1/4"	6,5	<2,5	75

Die grinder set



RRI-3007 / RRI-3006

Type	Brand	Wheel size mm	RPM	Power kW	Collet chuck mm	Air-cons. l/s	Weight kg	Inlet-thread	Hose diameter mm	Vibration m/s ²	Noise level dB(A)
RRI-3007	RRI	9	70.000	0,08	3	1,6	0,35	PT 1/4"	6,5	1,2	77
RRI-3006	RRI	12	58.000	0,10	3	1,6	0,35	PT 1/4"	6,5	0,8	80

Grinders

Die grinders



RRI-34100



RRI-3445



MG-OA



RRI-3430



MG-7206B



MG-OC



RRG-200RE / RRG-500RE



RRG-200REL / RRG-500REL



RRI-3425



RRI-3425L / RRI-3425EL



MG-1B



RRI-3407



RRG-202T

Type	Brand	Wheel size mm	RPM	Power kW	Collet chuck mm	Air-cons. l/s	Weight kg	Inlet-thread	Hose diameter mm	Vibration m/s ²	Noise level dB(A)
RRI-34100	RRI	6	100.000	0,09	3	3,3	0,20	PT 1/4"	6,5	<2,5	73
RRI-3445	RRI	20	45.000	0,30	3 / 6	7,5	0,40	PT 1/4"	10	2,4	79
MG-OA	YOKOTA	20	25.000	0,30	6	6,2	0,45	PT 1/4"	6,5	5	78
RRI-3430	RRI	20	30.000	0,23	3 / 6	7,5	0,40	PT 1/4"	10	2,2	81
MG-7206B	TOKU	25	23.000	0,38	6	5,0	0,56	PT 1/4"	6,5	2,3	81
MG-OC	YOKOTA	25	33.000	0,13	6	3,0	0,39	PT 1/4"	6,5	3	78
RRG-200RE	RRA	35	25.000	0,25	6	4,0	0,56	PT 1/4"	6,5	2,5	83
RRG-200REL	RRA	35	25.000	0,25	6	4,0	0,86	PT 1/4"	6,5	1,5	83
RRG-500RE	RRA	35	20.000	0,37	6	4,6	0,7	PT 1/4"	6,5	1,68	79
RRG-500REL	RRA	35	20.000	0,37	6	4,6	1,4	PT 1/4"	6,5	1,68	79
RRI-3425	RRI	35	25.000	0,50	3 / 6	12,3	0,8	PT 1/4"	10	2	80,2
RRI-3425L	RRI	35	20.000	0,50	3 / 6	12,3	0,8	PT 1/4"	10	2,5	80,2
RRI-3425EL	RRI	35	20.000	0,50	3 / 6	12,3	0,95	PT 1/4"	10	2,5	80,6
MG-1B	TOKU	45	18.000	0,28	6	8,0	0,55	PT 1/4"	10	1,3	77
RRI-3407	RRI	35	7.000	0,70	6	4,0	1,15	PT 1/4"	6,5	<2,5	84
RRG-202T*	RRA	80	2.500	0,3	7/16" HEX	4,0	1,1	PT 1/4"	6,5	2	84

* Tire buffer / Shaftlength: RRG-200REL: 75 mm / RRG-500REL: 150 mm / RRI-3425: 130 mm / RRI-3425L: 215 mm / RRI-3425EL: 240 mm

Note: MG-7206B and RRG-200RE are also available in set (including assortment abrasives).

Collet chucks for die grinders are supplied with the tool.

For collet chuck's and nuts see p. 41/42.