

Ratchet wrenches



Ratchet wrenches 1/4" - 3/8" - 1/2" Square drive

Type	Brand	Square-drive	Bolt capacity mm	RPM	Torque Nm	Air-consumption l/s	Weight kg	Inlet-thread	Hose-diameter mm	Vibration m/s²	Noise-level dB(A)
RRW-2202	RRA	1/4"	8	270	32	5,0	0,5	PT 1/4"	6,5	4,3	85
MR-2207C	TOKU	1/4"	8	250	28	5,0	0,5	PT 1/4"	6,5	2,7	81
RRW-2203	RRA	3/8"	10	270	32	5,0	0,5	PT 1/4"	6,5	4,3	85
MR-2209C	TOKU	3/8"	10	250	28	5,0	0,5	PT 1/4"	6,5	2,7	81
RRW-2403	RRA	3/8"	12	150	68	6,0	1,2	PT 1/4"	6,5	5,8	85
MR-2310B	TOKU	3/8"	12	175	78	6,0	1,2	PT 1/4"	6,5	3	85
RRW-2404	RRA	1/2"	12	150	68	6,0	1,2	PT 1/4"	6,5	5,8	85
MR-2410B	TOKU	1/2"	12	175	78	6,0	1,2	PT 1/4"	6,5	1,3	81
RRW-121	RRA	1/2"	12	135	120	8,0	1,9	PT 1/4"	10	2,3	88

Reactionless ratchet wrenches


RRW-3403	RRA	3/8"	12	500	95	6,0	1,28	PT 1/4"	6,5	4,5	91
RRW-3404	RRA	1/2"	12	500	95	6,0	1,28	PT 1/4"	6,5	4,5	91

Ratchet wrenches for the assembly industry

YRW-6	YOKOTA	8, 9, 10 *	6	200	13	4,6	1,15	PT 1/4"	6,5	2,5	81
YRW-8NS	YOKOTA	10, 12, 13, 14 *	8	250	30	8,3	2,00	PT 1/4"	10	2,5	82
YRW-10N	YOKOTA	14, 17 *	10	140	45	11,6	2,65	PT 1/4"	10	2,5	84


* Socket size in mm. Please state socket size in your order.

DIMENSIONS	Type	A mm	B mm	C mm	D mm	E mm	F mm
	MR-2207C	165	33	-	-	-	-
	MR-2209C	165	33	-	-	-	-
	MR-2310B	255	44	-	-	-	-
	MR-2410B	255	50	-	-	-	-
	RRW-121	357	57	-	-	-	-
	RRW-2202	180	32	-	-	-	-
	RRW-2203	180	32	-	-	-	-
	RRW-2403	250	40	-	-	-	-
	RRW-2404	250	45	-	-	-	-
	RRW-3403	280	40	-	-	-	-
	RRW-3404	280	45	-	-	-	-
	YRW-6	320	13	13	88	20	10
	YRW-8NS	350	18	13	105	25	12,5
	YRW-10N	388	18	18	108	33	16,5

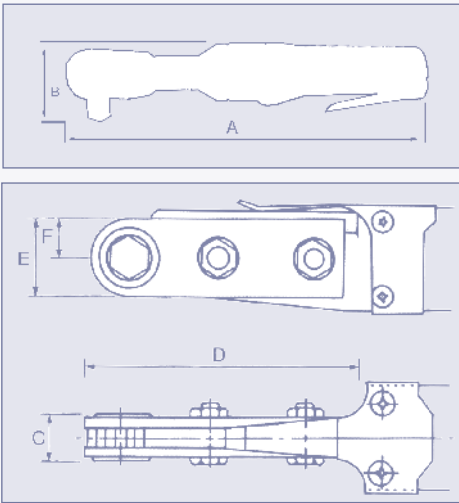

Screwdrivers

Hammermechanism / Direct drive

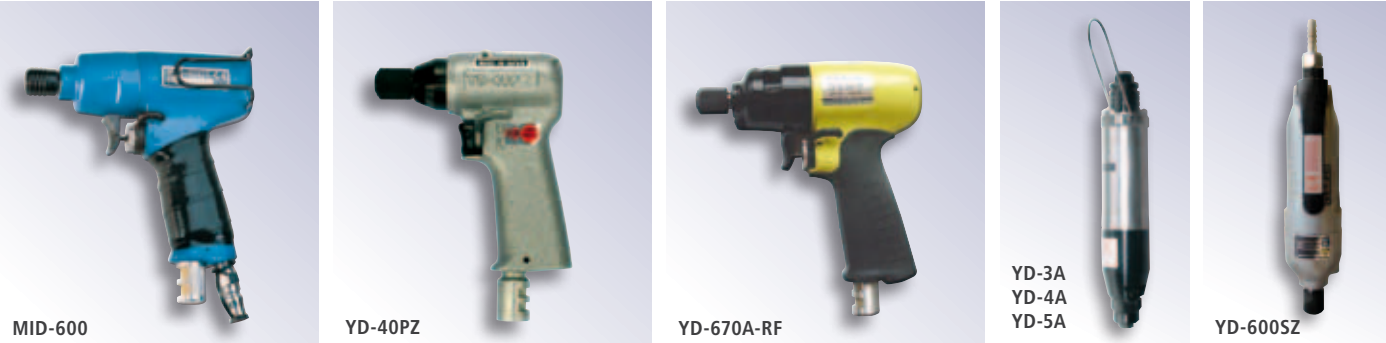

Type	Brand	Hex drive	Bolt capacity mm	Model	RPM	Torque Nm	Air-cons. l/s	Weight kg	Inlet-thread	Hose-diameter mm	Vibration m/s²	Noise level dB(A)
------	-------	-----------	------------------	-------	-----	-----------	---------------	-----------	--------------	------------------	----------------	-------------------

1-Hammer

YD-3A ¹⁾	YOKOTA	1/4" Hex	4	Straight	12.000	7,5	1,6	0,50	PT 1/8"	6,5	2,3	82
YD-4A ¹⁾	YOKOTA	1/4" Hex	5	Straight	11.000	12,0	2,3	0,60	PT 1/8"	6,5	2	90
YD-5A ¹⁾	YOKOTA	1/4" Hex	6	Straight	10.000	15,5	3,2	0,85	PT 1/8"	6,5	2,5	90

2-Hammer

MID-600 ²⁾	TOKU	1/4" Hex	3-5	Pistol	9.500	90	5,0	0,9	PT 1/4"	6,5	3,6	82
YD-40PZ	YOKOTA	1/4" Hex	4	Pistol	14.000	15	1,6	0,52	PT 1/4"	6,5	4	80
YD-600SZ ²⁾	YOKOTA	1/4" Hex	6	Straight	7.500	37	5,0	0,95	PT 1/4"	6,5	1,6	77
YD-670A-RF ³⁾	YOKOTA	1/4" Hex	6	Pistol	7.500	90	6,1	0,98	PT 1/4"	6,5	1,5	75

Direct drive

RR-0800DD	RRA	1/4" Hex	6	Pistol	800	10,5	9,8	1,0	PT 1/4"	10	3,5	83
RR-1800DD	RRA	1/4" Hex	6	Pistol	1.800	7,5	9,8	1,0	PT 1/4"	10	3,5	83

¹⁾ Supplied with regulator

²⁾ Air supply adjustable with 4 step button

³⁾ Supplied with rubber protection cover

CONTROL	1-Hammer		Direct drive	
	YD-3A	Push start	RR-0800DD	Trigger start
	YD-4A	Push start	RR-1800DD	Trigger start
	YD-5A	Push start		
	2-Hammer		Clutch type mechanism	
	MID-600	Trigger start	YD-400SCA	Push start
	YD-40PZ	2-step trigger	YD-5PHCA	2-step trigger
	YD-600SZ	Lever control	RR-06SP/RR-02SP	Trigger start
	YD-670A-RF	2-step trigger	RR-02SC/RR-06SC	Lever start