



(Optional)



BN900




RBN



6PIN

- Whole series use brushless motor, no carbon pollution, and low noise motor operation. It is the best fit for assembling power torque products.
- Assemble large-sized LED/LCD panel and home appliances. Tools can be hanged with spring balancer to lessen work fatigue.
- SKD-TBN series torque range can reach up to 2~18 N.m ; SKD-RBN series torque range can reach up to 2~50 N.m. High accuracy and stable torque output can replace pneumatic screwdriver to avoid unstable torque due to the fluctuation of the air pressure. Also can prevent oil and noise pollution and achieve energy saving and more Eco-friendly.
- SKD-RBN series must be collaborated with Auxiliary Arm and SKD-TBN series must be equipped with side handle, which can increase stable torque output, torque precision, and easier for user to operate.
- Suitable for assembling large-scale work pieces in semi-automatic or full automatic assembly line. In particular, the most suitable for applications such as automotive industrial parts assembly, air conditioning, electricity, telecommunications, large appliances and medical equipment assembly.
- Highly mobility, easy to operate, stable torque, high efficiency. Motor can be free from fatigue under long-working hours.

### Torque Range Chart

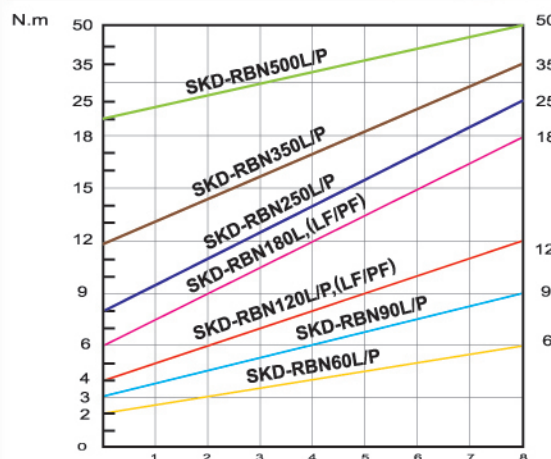

### Accessories

Spiral Cable



Spring Balancer  
KL-2000



Suspension rack  
KH-7



Torque Fixing Ring  
KC-22A






Screw Counter  
SKP-BC40HL-800(V3.0)



Power Counter  
SKP-40B-HL-800

### Specifications

Model		SKD-RBN60L SKD-RBN60P	SKD-RBN90L SKD-RBN90P	SKD-RBN120L SKD-RBN120P	SKD-RBN120LF SKD-RBN120PF	SKD-RBN180L SKD-RBN180P	SKD-RBN180LF SKD-RBN180PF	SKD-RBN250L SKD-RBN250P	SKD-RBN350L SKD-RBN350P	SKD-RBN500L SKD-RBN500P		
Input Voltage		DC40V										
Power Consumption		100W	120W	120W	150W	200W	150W	150W	150W	150W		
Torque	(N.m)	2~6	3~9	4~12	4~12	6~18	6~18	8~25	12~35	20~50		
Repeatable Torque Accuracy(%)		±5%										
Torque Adjustment		Stepless										
Free Speed (r.p.m)	HI	1000	800	550	880	350	600	350	350	200		
	LO	—	—	—	—	—	—	—	—	—		
Screw Size Dia (mm)	Machine Screw	4.0~5.0	5.0~6.0	≤6	≤6	≤8	≤8	≤8	≤10	≤12		
	Tapping Screw	≤4	≤4.5	≤5	≤5	≤6	≤6	≤6	≤8	≤10		
Weight(kg)		1.25							2.2			
Length(mm)		298							393			
ESD(Anti-Static)		✔ (with black housing)							✔			
CE		✔							✔			
RoHS		✔							✔			
Auxiliary Arm		✔							✔			
Handle Grip		✔										
Power Controller		SKP-40B-HL-800										
Bit Type		<div>B</div> <div></div> <div>HEX 6.35mm(No.3)</div>					<div>W</div> <div></div> <div>3/8"sq</div>				<div>W</div> <div></div> <div>1/2"</div>	

B  HEX 6.35mm(No.3)


W   

# BRUSHLESS POWER TORQUE DC-TYPE AUTOMATIC TRIGGER AND PUSH START CLUTCH TYPE SERIES



## SKD-TBN /BN900 Series




### Torque Range Chart

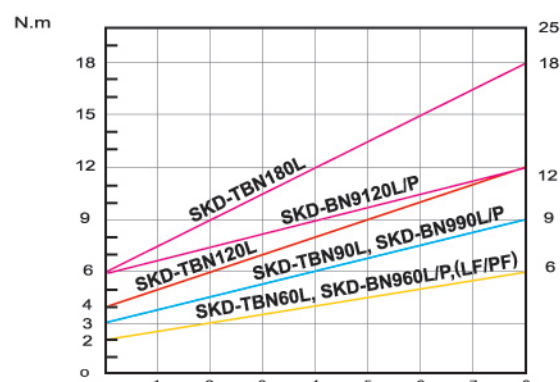

### External Dimension

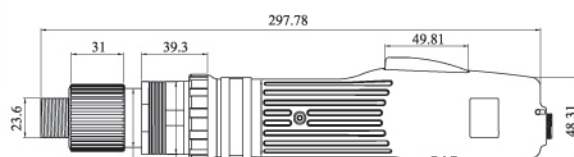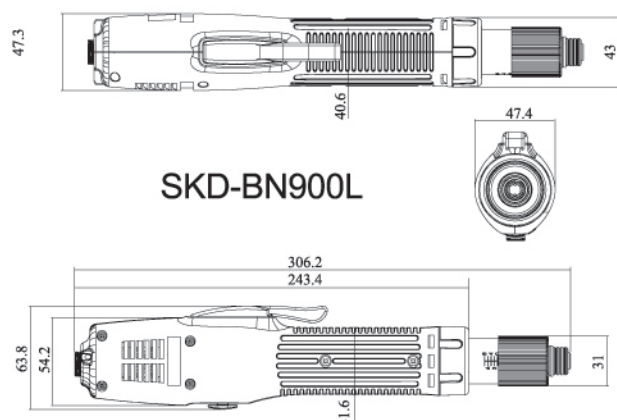

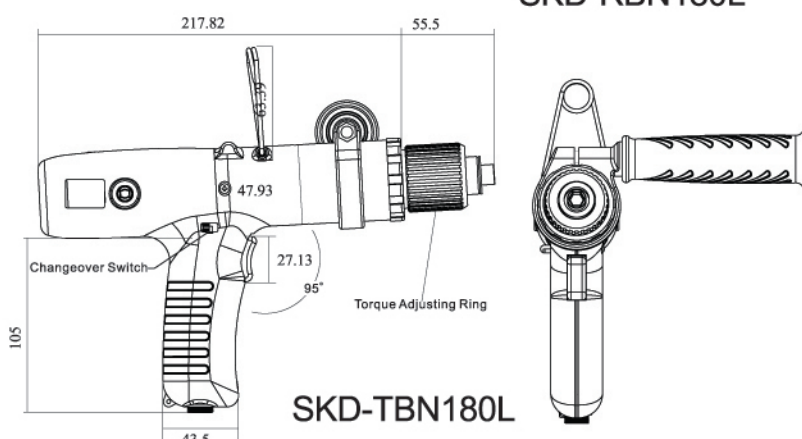


SKD-RBN180L



SKD-TBN180L

### Specifications

Model		SKD-TBN60L	SKD-TBN90L	SKD-TBN120L	SKD-TBN180L	SKD-BN960L SKD-BN960P	SKD-BN960LF SKD-BN960PF	SKD-BN990L SKD-BN990P	SKD-BN9120L SKD-BN9120P
Input Voltage		DC40V							
Power Consumption		100W	120W	120W	150W	150W	150W	150W	150W
Torque	(N.m)	2~6	3~9	4~12	6~18	2~6	2~6	3~9	6~12
Repeatable Torque Accuracy(%)		±5%				±5%			
Torque Adjustment		Stepless				Stepless			
Free Speed (r.p.m)	HI	1000	800	550	350	1000	2000	1000	880
	LO	—	—	—	—	—	—	—	—
Screw Size Dia (mm)	Machine Screw	4.0~5.0	5.0~6.0	≤8	≤10	4.0~5.0	4.0~5.0	≤6	≤8
	Tapping Screw	≤4	≤4.5	≤6	≤8	≤4	≤4	≤5	≤6
Weight(kg)		1.20				1.03			
Length(mm)		274X160				306			
ESD(Anti-Static)		—				✓(with black housing)			
CE		✓				✓			
RoHS		✓				✓			
Auxiliary Arm		—				KP-AUX			
Handle Grip		✓				✓			
Power Controller		SKP-40B-HL-800							
Bit Type		<div>B</div> <div>HEX 6.35mm(No.3)</div>				<div>W</div> <div>3/8"sq</div>			