



# Hose



- **PUR Hose Straight**
- **PUR Hose Spiral**
- **PUR Hose Kits**
- **PA Hose**
- **Adapters**

# CEJN's Wide Range of Pneumatic Hose Styles Offers Many Choices



CEJN Stream-Line hose is a polyurethane (PUR) hose that offers excellent performance qualities. High tensile strength and tear strength, along with resistance to oils, solvents, and other non-aqueous solutions, make it a perfect choice for demanding applications. Since it is light in weight (as low as 0.037 kg/meter) and offers outstanding flexibility—even at low temperatures—CEJN Stream-Line hose is ideal for small and lightweight tools.

While conventional PVC hose styles gradually harden over time, CEJN Stream-Line PUR hose remains flexible and outlasts conventional PVC hose up to 10 times, due to its extreme resistance to aging. CEJN PUR hose also offers outstanding abrasion resistance, impact strength, and rebound resistance.

With a wide temperature range from -20°C to +60°C, CEJN Stream-Line hose can be used in a wide variety of applications.

## Two New Styles Offered in Standard Range

New to the CEJN Stream-Line hose family are two new styles:

- Anti-spark hose for breathing air applications in welding environments
- Electrically conductive hose that dissipates electrostatic discharge

CEJN's Stream-Line hose family also includes polyamid (PA) hose that is produced to DIN/ASTM specifications. Constructed with nylon 11, this hose is UC resistant and is suitable for both water and compressed air applications.



When you need unbeatable performance, specify CEJN Stream-Line hose with CEJN high-quality couplings.

# CEJN Stream-Line Straight-Braided Hose

With a working pressure up to 16 bar, CEJN Stream-Line straight-braided PUR hose is well-suited for compressed air tools and tough applications in which strength and durability are required.

Both the hose's inner and outer layers are made of blue ester-based PUR, which binds the layers together with a reinforced middle layer of polyester fiber. This construction makes the hose both light and flexible, yet extremely tough and long lasting.

Meter markings are indicated on the hose to make cutting and assembly easy.

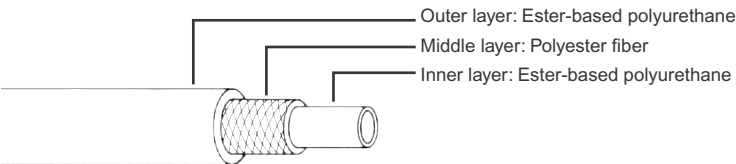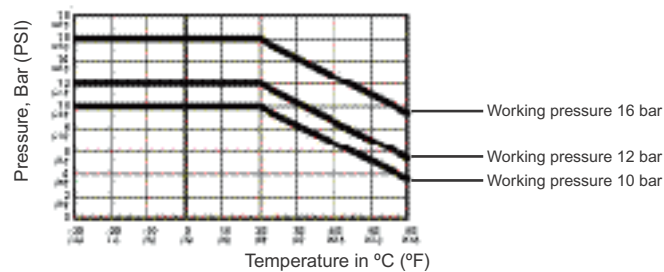

| Part No.    | Size ID x OD (mm) | Working Pressue (bar/PSI) | Total Length per Roll (m) |
|-------------|-------------------|---------------------------|---------------------------|
| 19 958 1000 | 6.5 x 10.0        | 16 / 232                  | 100                       |
| 19 958 1200 | 8.0 x 12.0        | 16 / 232                  | 100                       |
| 19 958 1350 | 9.5 x 13.5        | 12 / 174                  | 100                       |
| 19 958 1370 | 9.5 x 13.5        | 12 / 174                  | 50                        |
| 19 958 1600 | 11.0 x 16.0       | 12 / 174                  | 100                       |
| 19 958 1638 | 11.0 x 16.0       | 12 / 174                  | 50                        |
| 19 958 1801 | 13.0 x 18.0       | 10 / 145                  | 50                        |

Check with your local CEJN retailer for availability and prices.



Combining CEJN hose with CEJN high-quality pneumatic couplings results in an unbeatable combination of quality, flow, and performance.




# CEJN Stream-Line Straight Non-Braided Hose

CEJN Stream-Line straight non-braided hose has a working pressure of 10 bar. This PUR hose is suited for compressed air tools and automation and control applications in which cylinders and valves are used. It is a perfect match for small, lightweight tools since it is extremely light in weight. Due to tight-tolerance dimensions, the hose can be used with push-on fitting.

Its blue ester-based PUR construction makes the hose flexible, strong, and long lasting.

Meter markings are indicated on the hose to make cutting and assembly easy.

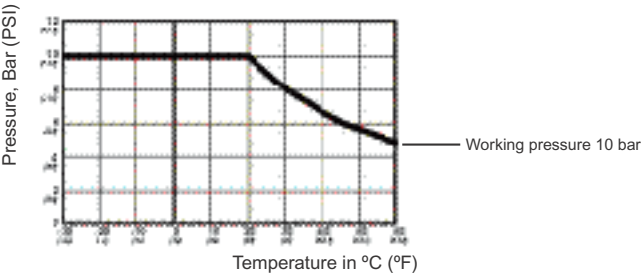

| Part No.                      | Size ID x OD (mm) | Working Pressue (bar/PSI) | Total Length per Roll (m) |
|-------------------------------|-------------------|---------------------------|---------------------------|
| 19 958 0702                   | 4.0 x 6.0         | 10 / 145                  | 100                       |
| 19 958 0802                   | 5.0 x 8.0         | 10 / 145                  | 100                       |
| 19 958 1002                   | 6.5 x 10.0        | 10 / 145                  | 100                       |
| 19 958 1202                   | 8.0 x 12.0        | 10 / 145                  | 100                       |
| 19 958 1602                   | 11.0 x 16.0       | 10 / 145                  | 100                       |
| NON-BRAIDED POLYURETHANE HOSE |                   |                           |                           |

Check with your local CEJN retailer for availability and prices.





CEJN hose couplings are easy to use—and reuse—and can be removed without damaging either the hose or the coupling.

## CEJN Stream-Line Spiral Non-Braided Hose

With a working pressure of 10 bar, CEJN Stream-Line spiral non-braided PUR hose is ideal for compressed air tools used in production lines and at workstations. Its spiral configuration makes it easy to recoil and won't clutter work areas. Extremely light in weight, this hose is a good choice for small and lightweight tools and is compatible with push-on fittings.

The hose features an ester-based PUR construction, which offers flexibility, strength, and long life.

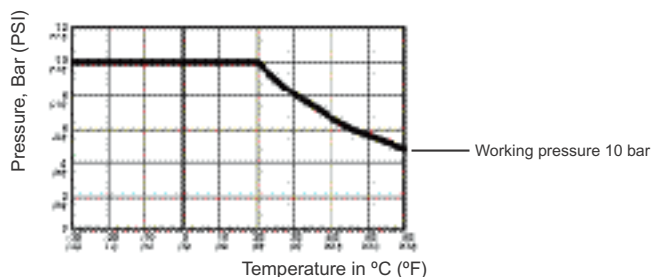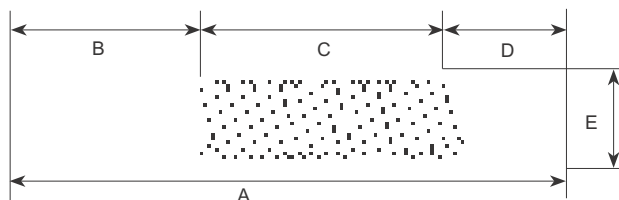

|            | Part No.     | Size (mm)<br>ID x OD | Service<br>Length (m) | Total Hose<br>Length (m) | A<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) | E<br>(mm) | Work. Pressure<br>bar/PSI, 20°C |
|------------|--------------|----------------------|-----------------------|--------------------------|-----------|-----------|-----------|-----------|-----------|---------------------------------|
| SPIRALHOSE | 19 958 5820  | 5.0 x 8.0            | 2.0                   | 2.5                      | 740       | 500       | 140       | 100       | 42        | 10 / 145                        |
|            | 19 958 5840  | 5.0 x 8.0            | 4.0                   | 5.0                      | 930       | 500       | 330       | 100       | 42        | 10 / 145                        |
|            | 19 958 5860  | 5.0 x 8.0            | 6.0                   | 7.5                      | 1120      | 500       | 520       | 100       | 42        | 10 / 145                        |
|            | 19 958 5880  | 5.0 x 8.0            | 8.0                   | 10.0                     | 1300      | 500       | 700       | 100       | 42        | 10 / 145                        |
|            | 19 958 6020  | 6.5 x 10.0           | 2.0                   | 2.5                      | 740       | 500       | 140       | 100       | 52        | 10 / 145                        |
|            | 19 958 6040  | 6.5 x 10.0           | 4.0                   | 5.0                      | 930       | 500       | 330       | 100       | 52        | 10 / 145                        |
|            | 19 958 6060  | 6.5 x 10.0           | 6.0                   | 7.5                      | 1120      | 500       | 520       | 100       | 52        | 10 / 145                        |
|            | 19 958 6080  | 6.5 x 10.0           | 8.0                   | 10.0                     | 1310      | 500       | 710       | 100       | 52        | 10 / 145                        |
|            | 19 958 6092  | 6.5 x 10.0           | 5.5                   | 6.9                      | 2440      | 2000      | 340       | 100       | 52        | 10 / 145                        |
|            | 19 958 6093  | 6.5 x 10.0           | 7.5                   | 9.7                      | 2640      | 2000      | 540       | 100       | 52        | 10 / 145                        |
|            | 19 958 6220  | 8.0 x 12.0           | 2.0                   | 2.5                      | 740       | 500       | 140       | 100       | 65        | 10 / 145                        |
|            | 19 958 6240  | 8.0 x 12.0           | 4.0                   | 5.0                      | 920       | 500       | 320       | 100       | 65        | 10 / 145                        |
|            | 19 958 6260  | 8.0 x 12.0           | 6.0                   | 7.5                      | 1100      | 500       | 500       | 100       | 65        | 10 / 145                        |
|            | 19 958 6280  | 8.0 x 12.0           | 8.0                   | 10.0                     | 1280      | 500       | 680       | 100       | 65        | 10 / 145                        |
|            | 19 958 6294  | 8.0 x 12.0           | 5.5                   | 6.5                      | 2420      | 2000      | 320       | 100       | 65        | 10 / 145                        |
|            | 19 958 6295  | 8.0 x 12.0           | 7.5                   | 9.0                      | 2600      | 2000      | 500       | 100       | 65        | 10 / 145                        |
|            | 19 958 6297* | 8.0 x 12.0           | 7.5                   | 9.0                      | 2600      | 2000      | 500       | 100       | 65        | 10 / 145                        |
|            | 19 958 6620  | 11.0 x 16.0          | 2.0                   | 2.5                      | 720       | 500       | 120       | 100       | 95        | 10 / 145                        |
|            | 19 958 6640  | 11.0 x 16.0          | 4.0                   | 5.0                      | 880       | 500       | 280       | 100       | 95        | 10 / 145                        |
|            | 19 958 6660  | 11.0 x 16.0          | 6.0                   | 7.5                      | 1040      | 500       | 440       | 100       | 95        | 10 / 145                        |
|            | 19 958 6680  | 11.0 x 16.0          | 8.0                   | 10.0                     | 1210      | 500       | 610       | 100       | 95        | 10 / 145                        |

\* Yellow hose

Check with your local CEJN retailer for availability and prices.





# CEJN Stream-Line Spiral Non-Braided Hose

## Anti-Spark Hose for Breathing Air

CEJN Stream-Line spiral non-braided hose is designed for tough breathing air and compressed air applications. The hose features a green ester-based PUR construction and anti-spark protection on its outer layer. Since it resists sparks and scorching, it is recommended for compressed air tool applications near welding equipment.

Specific sizes of the hose have Standard EN 12 419 approval for breathing air use, when used with approved breathing air filters and masks. (Contact your local distributor for complete information.)

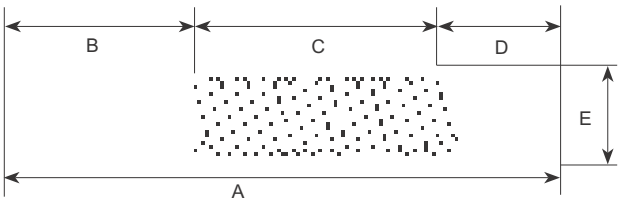

SPIRALHOSE

| Part No.    | Size (mm)<br>ID x OD | Service<br>Length (m) | Total Hose<br>Length (m) | A<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) | E<br>(mm) | Work. Pressure<br>bar/PSI, 20°C |
|-------------|----------------------|-----------------------|--------------------------|-----------|-----------|-----------|-----------|-----------|---------------------------------|
| 19 958 4020 | 6.5 x 10.0           | 2.0                   | 2.5                      | 740       | 500       | 140       | 100       | 52        | 10 / 145                        |
| 19 958 4040 | 6.5 x 10.0           | 4.0                   | 5.0                      | 930       | 500       | 330       | 100       | 52        | 10 / 145                        |
| 19 958 4060 | 6.5 x 10.0           | 6.0                   | 7.5                      | 1120      | 500       | 520       | 100       | 52        | 10 / 145                        |
| 19 958 4080 | 6.5 x 10.0           | 8.0                   | 10.0                     | 1310      | 500       | 710       | 100       | 52        | 10 / 145                        |
| 19 958 4220 | 8.0 x 12.0           | 2.0                   | 2.5                      | 740       | 500       | 140       | 100       | 65        | 10 / 145                        |
| 19 958 4240 | 8.0 x 12.0           | 4.0                   | 5.0                      | 920       | 500       | 320       | 100       | 65        | 10 / 145                        |
| 19 958 4260 | 8.0 x 12.0           | 6.0                   | 7.5                      | 1100      | 500       | 500       | 100       | 65        | 10 / 145                        |
| 19 958 4280 | 8.0 x 12.0           | 8.0                   | 10.0                     | 1280      | 500       | 680       | 100       | 65        | 10 / 145                        |

Check with your local CEJN retailer for availability and prices.




# CEJN Stream-Line Straight Braided Hose

## Electrically Conductive Hose

CEJN Stream-Line straight braided hose has a working pressure up to 16 bar and features an anti-static shield, making it a good choice for electronic equipment production lines.

This three-layer hose features two layers of transparent ester-based PUR and a reinforced inner layer of polyester fiber. An integral wire dissipates electro-static discharges and minimizes errant sparks. When assembled, the integral wire needs to be in contact with the hose connection for proper function.

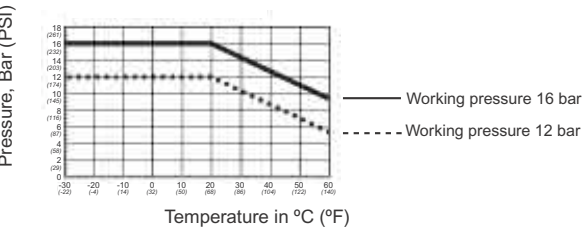

|      | Part No.    | Size ID x OD (mm) | Working Pressue (bar/PSI) | Total Length per Roll (m) |
|------|-------------|-------------------|---------------------------|---------------------------|
| HOSE | 19 958 1050 | 6.5 x 10.0        | 16                        | 100                       |
|      | 19 958 1250 | 8.0 x 12.0        | 16                        | 100                       |
|      | 19 958 1650 | 11.0 x 16.0       | 12                        | 100                       |

Check with your local CEJN retailer for availability and prices.


# CEJN Stream-Line Straight Braided Hose

## For Water

CEJN Stream-Line straight polyurethane hose, designed for working pressures up to 10 bar, is suitable for both water and compressed air applications. When compressed air lines are in prolonged contact with water, use this hose instead of an air hose to ensure proper function.

Flexible and long lasting, it features two layers of blue ether-based PUR and a reinforced middle layer of polyester fiber. This construction gives the hose an extended temperature range of -30 °C to +60 °C. Additional sizes are available upon request.

Meter markings are indicated on the hose to make cutting and assembly easy.

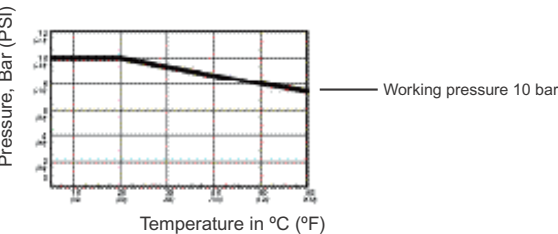

|       | Part No.    | Size ID x OD (mm) | Working Pressue (bar/PSI) | Total Length per Roll (m) |
|-------|-------------|-------------------|---------------------------|---------------------------|
| WATER | 19 958 1240 | 8.0 x 12.0        | 10 / 145                  | 100                       |
|       | 19 958 1640 | 11.0 x 16.0       | 10 / 145                  | 100                       |

Check with your local CEJN retailer for availability and prices.



# The CEJN Stream-Line Hose & Fitting Concept

The CEJN Stream-Line concept reliably connects hose and couplings every time and eliminates the need for bulky hose clamps. The fittings are reusable, saving time and money for replacements.



## Stream-Line Advantages

CEJN Stream-Line hose offers many additional advantages over traditional PVC and rubber hose styles, including:

- Greater flexibility, even at very low temperatures
- Wide temperature range from -20°C to +60°C (-4°F to +140°F)
- Extremely good aging properties
- Light in weight
- Oil resistance
- High flow rates due to non-restricting connections


## Several Sizes and Colors Available

CEJN Stream-Line hose is offered in the standard color of blue; however, other colors and sizes are available upon request. Contact your local distributor for options.




# Hose Kits with Series 300 Coupling and Nipple


Hose 5x8 mm

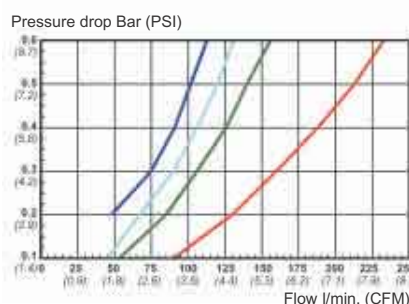

Hose 6.5x10 mm

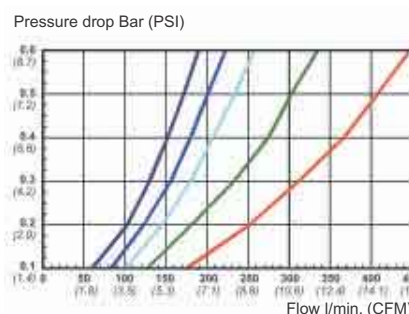

Hose 8x12 mm

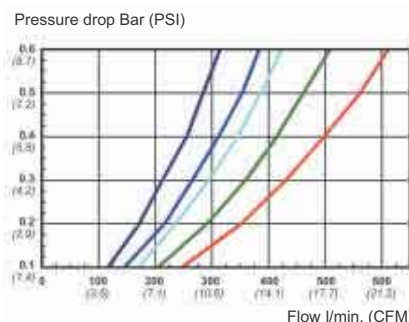

Hose 11x16 mm



Length: 20 m

Length: 10 m  
(8 m spiral)

Length: 7.5 m  
(6 m spiral)

Length: 5 m  
(4 m spiral)

Length: 2.5 m  
(2 m spiral)

|                   | ID x OD, mm | Length | Coupling/Nipple Series 300<br>Standard | Vented      |
|-------------------|-------------|--------|----------------------------------------|-------------|
| SPIRAL HOSE       | 5.0 x 8.0   | 2 m    | 19 958 9977                            | -           |
|                   |             | 4 m    | 19 958 9980                            | -           |
|                   |             | 6 m    | 19 958 9982                            | -           |
|                   |             | 8 m    | 19 958 9984                            | -           |
|                   | 6.5 x 10.0  | 2 m    | 19 958 9946                            | 19 958 9739 |
|                   |             | 4 m    | 19 958 9948                            | 19 958 9740 |
|                   |             | 6 m    | 19 958 9952                            | 19 958 9741 |
|                   |             | 8 m    | 19 958 9956                            | 19 958 9742 |
|                   | 8.0 x 12.0  | 2 m    | 19 958 9996                            | 19 958 9778 |
|                   |             | 4 m    | 19 958 9975                            | 19 958 9712 |
|                   |             | 6 m    | 19 958 9960                            | 19 958 9713 |
|                   |             | 8 m    | 19 958 9961                            | 19 958 9714 |
|                   | 11.0 x 16.0 | 2 m    | 19 958 9806                            | 19 958 9779 |
|                   |             | 4 m    | 19 958 9808                            | 19 958 9780 |
|                   |             | 6 m    | 19 958 9811                            | 19 958 9781 |
|                   |             | 8 m    | 19 958 9813                            | 19 958 9782 |
| HOSE, braided     | 6.5 x 10.0  | 7.5 m  | 19 958 9994                            | -           |
|                   |             | 10 m   | 19 958 9959                            | 19 958 9793 |
|                   |             | 15 m   | 19 958 9995                            | 19 958 9794 |
|                   |             | 20 m   | 19 958 9789                            | 19 958 9795 |
|                   | 8.0 x 12.0  | 5 m    | -                                      | 19 958 9703 |
|                   |             | 7.5 m  | 19 958 9800                            | -           |
|                   |             | 10 m   | 19 958 9802                            | 19 958 9704 |
|                   |             | 15 m   | 19 958 9842                            | 19 958 9705 |
|                   |             | 20 m   | 19 958 9790                            | 19 958 9796 |
|                   | 11.0 x 16.0 | 7.5 m  | 19 958 9815                            | -           |
|                   |             | 10 m   | 19 958 9816                            | 19 958 9797 |
|                   |             | 15 m   | 19 958 9791                            | 19 958 9798 |
|                   |             | 20 m   | 19 958 9792                            | 19 958 9799 |
| HOSE, non-braided | 5.0 x 8.0   | 10 m   | 19 958 9611                            | -           |
|                   |             | 15 m   | 19 958 9612                            | -           |
|                   |             | 20 m   | 19 958 9613                            | -           |
|                   | 6.5 x 10.0  | 10 m   | 19 958 9614                            | -           |
|                   |             | 15 m   | 19 958 9615                            | -           |
|                   |             | 20 m   | 19 958 9616                            | -           |
|                   | 8.0 x 12.0  | 10 m   | 19 958 9617                            | -           |
|                   |             | 15 m   | 19 958 9618                            | -           |
|                   |             | 20 m   | 19 958 9619                            | -           |
|                   | 11.0 x 16.0 | 10 m   | 19 958 9620                            | -           |
|                   |             | 15 m   | 19 958 9621                            | -           |
|                   |             | 20 m   | 19 958 9622                            | -           |


Check with your local CEJN retailer for availability and prices.

# Hose Kits with Series 310 Coupling and Nipple




|                   | ID x OD, mm | Length | Coupling/Nipple Series 310 |             |
|-------------------|-------------|--------|----------------------------|-------------|
|                   |             |        | Standard                   | Vented      |
| SPIRAL HOSE       | 5.0 x 8.0   | 2 m    | 19 958 9923                | -           |
|                   |             | 4 m    | 19 958 9924                | -           |
|                   |             | 6 m    | 19 958 9925                | -           |
|                   |             | 8 m    | 19 958 9926                | -           |
|                   | 6.5 x 10.0  | 2 m    | 19 958 9927                | 19 958 9783 |
|                   |             | 4 m    | 19 958 9928                | 19 958 9731 |
|                   |             | 6 m    | 19 958 9929                | 19 958 9732 |
|                   |             | 8 m    | 19 958 9930                | 19 958 9733 |
|                   | 8.0 x 12.0  | 2 m    | 19 958 9931                | 19 958 9784 |
|                   |             | 4 m    | 19 958 9932                | 19 958 9709 |
|                   |             | 6 m    | 19 958 9933                | 19 958 9710 |
|                   |             | 8 m    | 19 958 9934                | 19 958 9711 |
|                   | 11.0 x 16.0 | 2 m    | 19 958 9935                | 19 958 9785 |
|                   |             | 4 m    | 19 958 9936                | 19 958 9786 |
|                   |             | 6 m    | 19 958 9937                | 19 958 9787 |
|                   |             | 8 m    | 19 958 9938                | 19 958 9788 |
| HOSE, braided     | 6.5 x 10.0  | 7.5 m  | 19 958 9993                | -           |
|                   |             | 10 m   | 19 958 9600                | 19 958 9734 |
|                   |             | 15 m   | 19 958 9601                | 19 958 9735 |
|                   |             | 20 m   | 19 958 9602                | 19 958 9606 |
|                   | 8.0 x 12.0  | 5 m    | -                          | 19 958 9700 |
|                   |             | 7.5 m  | -                          | -           |
|                   |             | 10 m   | 19 958 9832                | 19 958 9701 |
|                   |             | 15 m   | 19 958 9833                | 19 958 9702 |
|                   |             | 20 m   | 19 958 9822                | 19 958 9607 |
|                   | 11.0 x 16.0 | 7.5 m  | -                          | -           |
|                   |             | 10 m   | 19 958 9603                | 19 958 9608 |
|                   |             | 15 m   | 19 958 9604                | 19 958 9609 |
|                   |             | 20 m   | 19 958 9605                | 19 958 9610 |
| HOSE, non-braided | 5.0 x 8.0   | 10 m   | 19 958 9623                | -           |
|                   |             | 15 m   | 19 958 9624                | -           |
|                   |             | 20 m   | 19 958 9625                | -           |
|                   | 6.5 x 10.0  | 10 m   | 19 958 9626                | -           |
|                   |             | 15 m   | 19 958 9627                | -           |
|                   |             | 20 m   | 19 958 9628                | -           |
|                   | 8.0 x 12.0  | 10 m   | 19 958 9629                | -           |
|                   |             | 15 m   | 19 958 9630                | -           |
|                   |             | 20 m   | 19 958 9631                | -           |
|                   | 11.0 x 16.0 | 10 m   | 19 958 9632                | -           |
|                   |             | 15 m   | 19 958 9633                | -           |
|                   |             | 20 m   | 19 958 9634                | -           |

Pressure drop Bar (PSI)

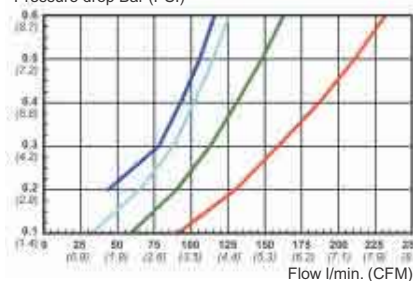


Hose 5x8 mm

Pressure drop Bar (PSI)

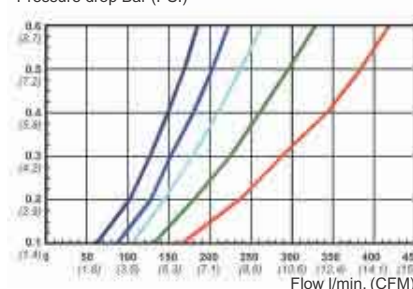


Hose 6.5x10 mm

Pressure drop Bar (PSI)

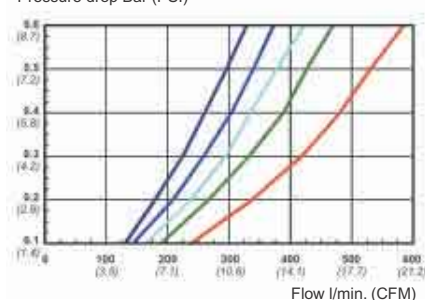

Hose 8x12 mm

Pressure drop Bar (PSI)

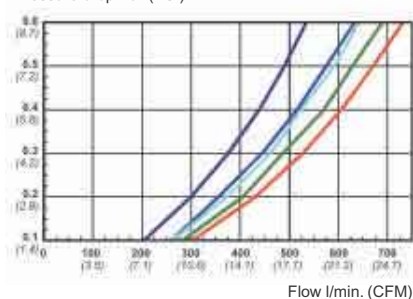

Hose 11x16 mm

Length: 20 m

Length: 10 m  
(8 m spiral)

Length: 7.5 m  
(6 m spiral)


Length: 5 m  
(4 m spiral)

Length: 2.5 m  
(2 m spiral)


Check with your local CEJN retailer for availability and prices.

# Hose Kits with Series 320 Coupling and Nipple


Hose 5x8 mm

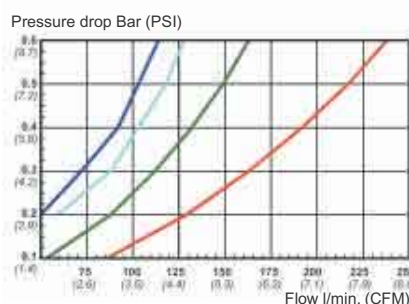


Hose 6.5x10 mm

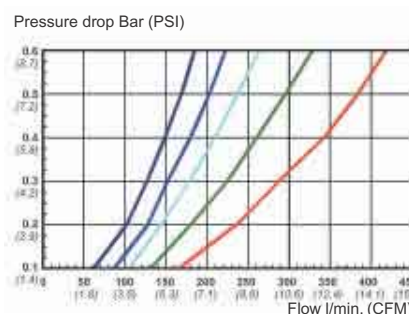

Hose 8x12 mm

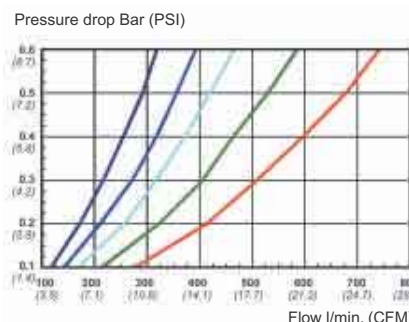

Hose 11x16 mm

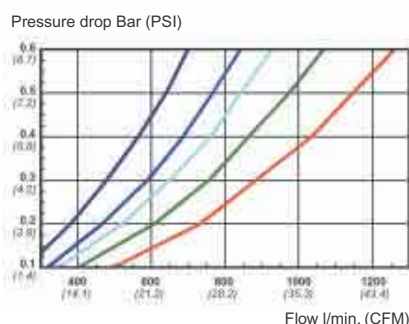

Length: 20 m

Length: 10 m  
(8 m spiral)

Length: 7.5 m  
(6 m spiral)

Length: 5 m  
(4 m spiral)

Length: 2.5 m  
(2 m spiral)

|                   | ID x OD, mm | Length | Coupling/Nipple Series 320<br>Standard | Vented      |
|-------------------|-------------|--------|----------------------------------------|-------------|
| SPIRAL HOSE       | 5.0 x 8.0   | 2 m    | 19 958 9907                            | -           |
|                   |             | 4 m    | 19 958 9903                            | -           |
|                   |             | 6 m    | 19 958 9908                            | -           |
|                   |             | 8 m    | 19 958 9909                            | -           |
|                   | 6.5 x 10.0  | 2 m    | 19 958 9910                            | 19 958 9763 |
|                   |             | 4 m    | 19 958 9904                            | 19 958 9764 |
|                   |             | 6 m    | 19 958 9912                            | 19 958 9765 |
|                   |             | 8 m    | 19 958 9913                            | 19 958 9766 |
|                   | 8.0 x 12.0  | 2 m    | 19 958 9914                            | 19 958 9782 |
|                   |             | 4 m    | 19 958 9905                            | 19 958 9706 |
|                   |             | 6 m    | 19 958 9915                            | 19 958 9707 |
|                   |             | 8 m    | 19 958 9916                            | 19 958 9708 |
| HOSE, braided     | 6.5 x 10.0  | 2 m    | 19 958 9917                            | 19 958 9767 |
|                   |             | 4 m    | 19 958 9906                            | 19 958 9768 |
|                   |             | 6 m    | 19 958 9918                            | 19 958 9769 |
|                   |             | 8 m    | 19 958 9919                            | 19 958 9770 |
|                   | 8.0 x 12.0  | 7.5 m  | 19 958 9993                            | -           |
|                   |             | 10 m   | 19 958 9882                            | 19 958 9771 |
|                   |             | 15 m   | 19 958 9883                            | 19 958 9772 |
|                   |             | 20 m   | 19 958 9747                            | 19 958 9773 |
|                   | 11.0 x 16.0 | 5 m    | -                                      | 19 958 9897 |
|                   |             | 7.5 m  | 19 958 9884                            | -           |
|                   |             | 10 m   | 19 958 9829                            | 19 958 9898 |
|                   |             | 15 m   | 19 958 9830                            | 19 958 9899 |
| HOSE, non-braided | 5.0 x 8.0   | 20 m   | 19 958 9831                            | 19 958 9774 |
|                   | 6.5 x 10.0  | 7.5 m  | -                                      | -           |
|                   |             | 10 m   | 19 958 9737                            | 19 958 9738 |
|                   |             | 15 m   | 19 958 9748                            | 19 958 9775 |
|                   | 8.0 x 12.0  | 20 m   | 19 958 9894                            | 19 958 9776 |
|                   | 11.0 x 16.0 | 10 m   | 19 958 9749                            | -           |
|                   |             | 15 m   | 19 958 9750                            | -           |
|                   |             | 20 m   | 19 958 9751                            | -           |
|                   | 6.5 x 10.0  | 10 m   | 19 958 9745                            | -           |
|                   |             | 15 m   | 19 958 9752                            | -           |
|                   |             | 20 m   | 19 958 9753                            | -           |
|                   | 8.0 x 12.0  | 10 m   | 19 958 9754                            | -           |
|                   |             | 15 m   | 19 958 9755                            | -           |
|                   |             | 20 m   | 19 958 9756                            | -           |
|                   | 11.0 x 16.0 | 10 m   | 19 958 9757                            | -           |
|                   |             | 15 m   | 19 958 9758                            | -           |
|                   |             | 20 m   | 19 958 9759                            | -           |

Check with your local CEJN retailer for availability and prices.

# Series 958 Hose Kits, Couplings, Nipples and Accessories



|            | IDxOD       | Length | Connection 1         | Connection 2     | Blowgun      | Remarks and Other Accessories             | Part No.    |
|------------|-------------|--------|----------------------|------------------|--------------|-------------------------------------------|-------------|
| SPIRALHOSE | 5.0 x 8.0   | 2m     | R 1/4"               | R 1/4"           | 207 standard | -                                         | 19 958 9649 |
|            |             |        | R 1/4" swiveling     | R 1/4" swiveling | -            | -                                         | 19 958 9978 |
|            |             |        | R 1/4" swiveling     | 320 coupling     | -            | -                                         | 19 958 9895 |
|            | 4 m         |        | 320 nipple           | 320 coupling     | 208 standard | Nipple assembled on blowgun               | 19 958 9651 |
|            |             |        | 320 nipple           | 320 coupling     | -            | -                                         | 19 958 9655 |
|            |             |        | 320 nipple           | R 1/4"           | 207 standard | -                                         | 19 958 9777 |
|            |             |        | 320 nipple           | R 1/4"           | 208 standard | -                                         | 19 958 9871 |
|            |             |        | 320 nipple           | R 1/4"           | 208 star-tip | -                                         | 19 958 9872 |
|            |             |        | R 1/4" swiveling     | R 1/4" swiveling | -            | -                                         | 19 958 9965 |
|            |             |        | 320 nipple           | R 1/4" swiveling | -            | -                                         | 19 958 9896 |
|            | 6 m         |        | 320 nipple           | R 1/4"           | 208 standard | Air curtain nozzle                        | 19 958 9645 |
|            |             |        | 310 nipple           | R 1/4"           | 208 standard | Nipple on long hose end                   | 19 958 9652 |
|            |             |        | R 1/4"               | R 1/4" swiveling | 208 standard | Blowgun with removable tube               | 19 958 9671 |
|            |             |        | R 1/4" swiveling     | R 1/4" swiveling | -            | -                                         | 19 958 9983 |
|            | 8 m         |        | R 1/4"               | R 1/4"           | -            | -                                         | 19 958 9857 |
|            |             |        | R 1/4" swiveling     | R 1/4" swiveling | -            | -                                         | 19 958 9985 |
|            |             |        | R 1/4"               | R 1/4"           | -            | -                                         | 19 958 9866 |
| SPIRALHOSE | 6.5 x 10.0  | 2 m    | 320 nipple           | R 1/4"           | 208 star-tip | Blowgun with removable tube               | 19 958 9654 |
|            |             |        | R 1/4" swiveling     | R 1/4" swiveling | -            | -                                         | 19 958 9947 |
|            |             |        | R 1/4"               | R 1/4"           | -            | -                                         | 19 958 9987 |
|            | 4 m         |        | 320 nipple           | R 1/4"           | 208 standard | Nipple on long hose end                   | 19 958 9639 |
|            |             |        | 303 nipple           | 303 coupling     | -            | -                                         | 19 958 9656 |
|            |             |        | 320 nipple           | 320 coupling     | 208 standard | Nipple assembled on blowgun               | 19 958 9699 |
|            |             |        | 320 nipple           | R 1/4"           | 207 standard | 90 mm tube + rubber tip nozzle            | 19 958 9730 |
|            |             |        | 320 nipple           | 320 coupling     | 208 star-tip | 10 320 1152 + Nipple assembled on blowgun | 19 958 9746 |
|            |             |        | R 1/4" swiveling     | R 1/4" swiveling | -            | -                                         | 19 958 9949 |
|            | 6 m         |        | R 1/4"               | R 1/4"           | -            | -                                         | 19 958 9988 |
|            |             |        | 300 nipple           | R 1/4"           | 208 star-tip | Blowgun with removable tube               | 19 958 9658 |
|            |             |        | 320 nipple           | 320 coupling     | 208 star-tip | Nipple assembled on blowgun               | 19 958 9760 |
|            |             |        | 320 nipple           | 320 coupling     | 208 standard | Nipple assembled on blowgun               | 19 958 9761 |
|            |             |        | R 1/4" swiveling     | R 1/4" swiveling | -            | -                                         | 19 958 9954 |
|            | 8 m         |        | R 1/4"               | R 1/4"           | -            | -                                         | 19 958 9955 |
|            |             |        | R 1/4" swiveling     | R 1/4" swiveling | -            | -                                         | 19 958 9957 |
|            |             |        | R 1/4"               | R 1/4"           | -            | -                                         | 19 958 9958 |
| SPIRALHOSE | 8.0 x 12.0  | 2 m    | R 3/8"               | 320 coupling     | -            | -                                         | 19 958 9726 |
|            |             |        | R 3/8" swiveling     | R 3/8" swiveling | -            | -                                         | 19 958 9997 |
|            |             | 4 m    | R 3/8"               | 320 coupling     | -            | -                                         | 19 958 9727 |
|            |             |        | R 3/8" swiveling     | R 3/8" swiveling | -            | -                                         | 19 958 9967 |
|            | 6 m         |        | R 3/8"               | R 3/8"           | -            | -                                         | 19 958 9805 |
|            |             |        | 410 nipple           | 410 coupling     | -            | -                                         | 19 958 9836 |
|            |             |        | R 3/8" swiveling     | R 3/8" swiveling | -            | -                                         | 19 958 9998 |
|            | 8 m         |        | R 3/8"               | R 3/8"           | -            | -                                         | 19 958 9804 |
|            |             |        | 300 nipple           | 300 coupling     | -            | Swiveling connections                     | 19 958 9820 |
|            |             |        | 430 nipple           | 430 coupling     | -            | Swiveling connections                     | 19 958 9821 |
|            |             |        | R 3/8" swiveling     | R 3/8" swiveling | -            | -                                         | 19 958 9809 |
|            |             |        | R 3/8"               | R 3/8"           | -            | -                                         | 19 958 9801 |
| SPIRALHOSE | 11.0 x 16.0 | 2 m    | R 1/2" swiveling     | R 1/2" swiveling | -            | -                                         | 19 958 9807 |
|            |             |        | R 1/2"               | R 1/2"           | -            | -                                         | 19 958 9810 |
|            |             | 4 m    | R 1/2" swiveling     | R 1/2"           | -            | -                                         | 19 958 9885 |
|            |             |        | R 1/2"               | R 1/2"           | -            | -                                         | 19 958 9875 |
|            | 6 m         |        | R 1/2" swiveling     | 320 coupling     | -            | -                                         | 19 958 9725 |
|            |             |        | R 1/2" NPT swiveling | 320 coupling     | -            | -                                         | 19 958 9729 |
|            |             |        | R 1/2" swiveling     | R 1/2" swiveling | -            | -                                         | 19 958 9812 |
|            |             |        | R 1/2"               | R 1/2"           | -            | -                                         | 19 958 9860 |
|            | 8 m         |        | 410 nipple           | 410 coupling     | -            | -                                         | 19 958 9837 |
|            |             |        | R 1/2" swiveling     | R 1/2" swiveling | -            | -                                         | 19 958 9814 |
|            |             |        | R 1/2"               | R 1/2"           | -            | -                                         | 19 958 9862 |

Thread connections are listed according to ISO Standards. Check with your local CEJN retailer for availability and prices.

## Hose Couplings, Nipples, and Adapters

CEJN continually improves and expands its product range through new product developments. Stream-Line connections are now available for Series 300, 303, 310, 315, 320, 408, 410, and 430. For fixed hose connections, a wide range of threaded adapters is available, with or without swivels. Adapters with swivels have swiveling properties under pressure up to 16 bar. See the CEJN Pneumatic Catalog for specific technical data on each series.



|           | Hose ID x OD<br>Dim. mm | Series 300  | Series 303  | Series 310  | Series 315  | Series 320  | Series 408  | Series 410  | Series 430  |
|-----------|-------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| COUPLINGS | 5.0 x 8.0               | 10 300 1058 | 10 303 1058 | 10 310 1058 | 10 315 1058 | 10 320 1058 | -           | -           | -           |
|           | 6.5 x 10.0              | 10 300 1060 | 10 303 1060 | 10 310 1060 | 10 315 1060 | 10 320 1060 | -           | -           | -           |
|           | 8.0 x 12.0              | 10 300 1062 | 10 303 1062 | 10 310 1062 | 10 315 1062 | 10 320 1062 | -           | -           | -           |
|           | 9.5 x 13.5              | 10 300 1063 | 10 303 1063 | 10 310 1063 | -           | 10 320 1063 | -           | -           | -           |
|           | 11.0 x 16.0             | 10 300 1066 | 10 303 1066 | 10 310 1066 | 10 315 1066 | 10 320 1066 | 10 408 1066 | 10 410 1066 | 10 430 1066 |

|         | Hose ID x OD<br>Dim. mm | Series 300  | Series 303  | Series 310  | Series 315  | Series 320  | Series 408  | Series 410  | Series 430  |
|---------|-------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| NIPPLES | 5.0 x 8.0               | 10 300 5058 | 10 303 5058 | 10 310 5058 | 10 315 5058 | 10 320 5058 | -           | -           | -           |
|         | 6.5 x 10.0              | 10 300 5060 | 10 303 5060 | 10 310 5060 | 10 315 5060 | 10 320 5060 | -           | -           | -           |
|         | 8.0 x 12.0              | 10 300 5062 | 10 303 5062 | 10 310 5062 | 10 315 5062 | 10 320 5062 | -           | -           | -           |
|         | 9.5 x 13.5              | 10 300 5063 | 10 303 5063 | 10 310 5063 | -           | 10 320 5063 | -           | -           | -           |
|         | 11.0 x 16.0             | 10 300 5066 | 10 303 5066 | 10 310 5066 | 10 315 5066 | 10 320 5066 | 10 408 5066 | 10 410 5066 | 10 430 5066 |

|          | Hose ID x OD<br>Dim. mm | Male Thread | R Thread<br>with swivel | R Thread<br>without swivel | NPT Thread<br>with swivel | NPT Thread<br>without swivel |
|----------|-------------------------|-------------|-------------------------|----------------------------|---------------------------|------------------------------|
| ADAPTERS | 5.0 x 8.0               | 1/4"        | 19 958 0862             | 19 958 0812                | 19 958 0892               | 19 958 0842                  |
|          | 6.5 x 10.0              | 1/4"        | 19 958 1062             | 19 958 1012                | 19 958 1092               | 19 958 1042                  |
|          | 8.0 x 12.0              | 1/4"        | 19 958 1262             | 19 958 1212                | 19 958 1292               | 19 958 1242                  |
|          | 8.0 x 12.0              | 3/8"        | 19 958 1264             | 19 958 1214                | 19 958 1294               | 19 958 1244                  |
|          | 9.5 x 13.5              | 1/4"        | 19 958 1362             | 19 958 1312                | 19 958 1392               | 19 958 1342                  |
|          | 9.5 x 13.5              | 3/8"        | 10 958 1364             | 19 958 1314                | 19 958 1394               | 19 958 1344                  |
|          | 11.0 x 16.0             | 1/2"        | 19 958 1665             | 19 958 1615                | 19 958 1695               | 19 958 1645                  |

|                                                                                                                                                                                                                                                                                                            | Hose Connection | Part No.    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------|
| KINK PROTECTORS                                                                                                                                                                                                                                                                                            | 6.5 x 10.0      | 10 300 4010 |
|                                                                                                                                                                                                                                                                                                            | 8.0 x 12.0      | 10 300 4012 |
|  <p>Kink protectors can be used on all Stream-Line connections with the corresponding hose size. Kink protectors are sold separately and can be replaced during use with the cap nut on the Stream-Line connection.</p> |                 |             |

Thread connections are listed according to ISO Standards. Check with your local CEJN retailer for availability and prices.




## CEJN-Line Spiral Hose Assemblies

CEJN-Line spiral hose assemblies are available in a wide variety of dimensions, connections, and lengths.

Featuring nylon 11, CEJN yellow spiral PA hose assemblies can be used for both water and compressed air applications up to 15 bar.

The hose is produced to DIN/ASTM specifications and is UV resistant. Its spiral configuration, up to 15 meters in length, makes it easy to recoil and won't clutter work areas.

Featuring a kink protector, the male fittings swivel, even at full working pressure. For Technical data see under adapters on next page.

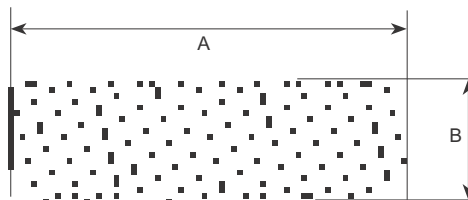

A= Spiral Length  
B= Spiral Diameter

|            | Part No.    | Thread Connection | Size (mm)<br>ID x OD | Service Length (m) | Total Hose Length (m) | Spiral Length (mm) | Spiral Diameter (mm) | Work. Pressure bar/PSI, 20°C |
|------------|-------------|-------------------|----------------------|--------------------|-----------------------|--------------------|----------------------|------------------------------|
| SPIRALHOSE | 90 045 0106 | R 1/4"            | 4.5 x 6.0            | 3.5                | 6.3                   | (200)              | 72                   | 15 / 217                     |
|            | 90 045 0108 | R 1/4"            | 4.5 x 6.0            | 5.0                | 8.3                   | (266)              | 72                   | 15 / 217                     |
|            | 90 045 0113 | R 1/4"            | 4.5 x 6.0            | 7.5                | 12.5                  | (400)              | 72                   | 15 / 217                     |
|            | 90 045 0125 | R 1/4"            | 4.5 x 6.0            | 15.0               | 25.0                  | (800)              | 72                   | 15 / 217                     |
|            | 90 060 0106 | R 1/4"            | 6.0 x 8.0            | 3.5                | 6.3                   | (200)              | 92                   | 15 / 217                     |
|            | 90 060 0108 | R 1/4"            | 6.0 x 8.0            | 5.0                | 8.3                   | (266)              | 92                   | 15 / 217                     |
|            | 90 060 1113 | R 1/4"            | 6.0 x 8.0            | 7.5                | 12.5                  | (400)              | 92                   | 15 / 217                     |
|            | 90 060 0125 | R 1/4"            | 6.0 x 8.0            | 15.0               | 25.0                  | (800)              | 92                   | 15 / 217                     |
|            | 90 075 0106 | R 1/4"            | 7.5 x 10.0           | 3.5                | 6.3                   | (200)              | 122                  | 15 / 217                     |
|            | 90 075 0108 | R 1/4"            | 7.5 x 10.0           | 5.0                | 8.3                   | (266)              | 122                  | 15 / 217                     |
|            | 90 075 0113 | R 1/4"            | 7.5 x 10.0           | 7.5                | 12.5                  | (400)              | 122                  | 15 / 217                     |
|            | 90 075 0125 | R 1/4"            | 7.5 x 10.0           | 15.0               | 25.0                  | (800)              | 122                  | 15 / 217                     |
|            | 90 090 0106 | R 3/8"            | 9.0 x 12.0           | 3.5                | 6.3                   | (200)              | 138                  | 15 / 217                     |
|            | 90 090 0108 | R 3/8"            | 9.0 x 12.0           | 5.0                | 8.3                   | (266)              | 138                  | 15 / 217                     |
|            | 90 090 0113 | R 3/8"            | 9.0 x 12.0           | 7.5                | 12.5                  | (400)              | 138                  | 15 / 217                     |
|            | 90 090 0125 | R 3/8"            | 9.0 x 12.0           | 15.0               | 25.0                  | (800)              | 138                  | 15 / 217                     |
|            | 90 113 0106 | R 1/2"            | 11.3 x 15.0          | 3.5                | 6.3                   | (200)              | 165                  | 15 / 217                     |
|            | 90 113 0108 | R 1/2"            | 11.3 x 15.0          | 5.0                | 8.3                   | (266)              | 165                  | 15 / 217                     |
|            | 90 113 0113 | R 1/2"            | 11.3 x 15.0          | 7.5                | 12.5                  | (400)              | 165                  | 15 / 217                     |
|            | 90 113 0125 | R 1/2"            | 11.3 x 15.0          | 15.0               | 25.0                  | (800)              | 165                  | 15 / 217                     |

Check with your local CEJN retailer for availability and prices.

## CEJN-Line Spiral Hose

CEJN-Line spiral hose is a yellow PA hose for both water and compressed air up to 15 bar. Featuring nylon 11, the hose is produced to DIN/ASTM specifications and is UV resistant. Its spiral configuration, up to 15 meters in length, makes it easy to recoil and won't clutter work areas.

Additional dimensions and colors are available upon request.



|            | Part No.    | Size (mm)<br>ID x OD | Service<br>Length (m) | Total Hose<br>Length (m) | Spiral Length<br>(mm) | Spiral Diameter<br>(mm) | Work. Pressure<br>bar/PSI, 20°C |
|------------|-------------|----------------------|-----------------------|--------------------------|-----------------------|-------------------------|---------------------------------|
| SPIRALHOSE | 90 045 0025 | 4.5 x 6.0            | 15.0                  | 25.0                     | (800)                 | 72                      | 15 / 217                        |
|            | 90 060 0025 | 6.0 x 8.0            | 15.0                  | 25.0                     | (800)                 | 92                      | 15 / 217                        |
|            | 90 075 0025 | 7.5 x 10.0           | 15.0                  | 25.0                     | (800)                 | 122                     | 15 / 217                        |
|            | 90 090 0025 | 9.0 x 12.0           | 15.0                  | 25.0                     | (800)                 | 138                     | 15 / 217                        |
|            | 90 113 0025 | 11.3 x 15.0          | 15.0                  | 25.0                     | (800)                 | 165                     | 15 / 217                        |

## Adapters

### Technical Data for CEJN-Line hose and adapters

Max. working pressure at +20°/+68°F: 15 bar (217 PSI)

Min. burst pressure: 60 bar ( 870 PSI)

Temperature range: -20° to +60° (-4°F to +140°F)

|            | Part No.     | Thread<br>Connection | Hose Size<br>OD (mm) |
|------------|--------------|----------------------|----------------------|
| SPIRALHOSE | 90 045 9012  | R 1/4"               | 6 mm                 |
|            | 90 060 9012  | R 1/4"               | 8 mm                 |
|            | 90 075 9012  | R 1/4"               | 10 mm                |
|            | 90 090 9014  | R 3/8"               | 12 mm                |
|            | 90 113 9005* | R 1/2"               | 15 mm                |

\* With non-swiveling connector and spring protectors



CEJN's wide range of pneumatic products can be found in the CEJN Pneumatic Catalog. To order the catalog, contact the nearest CEJN sales office or visit [www.cejn.com](http://www.cejn.com).

Information on CEJN's extensive range of couplings and accessories for gas, breathing air, fluids, hydraulics, and manifolds is also available online.



- Couplings/nipples
- Blowguns
- Hose reels
- Multi-Link units
- Adapters
- Dust caps
- Accessories

We reserve the right to changes without further notification.